


AquaTuff™ 35100-K and 35200-K

Waterproof Thermocouple Instruments with Tenth Degree Resolution

Switches quickly from Fahrenheit to Celsius

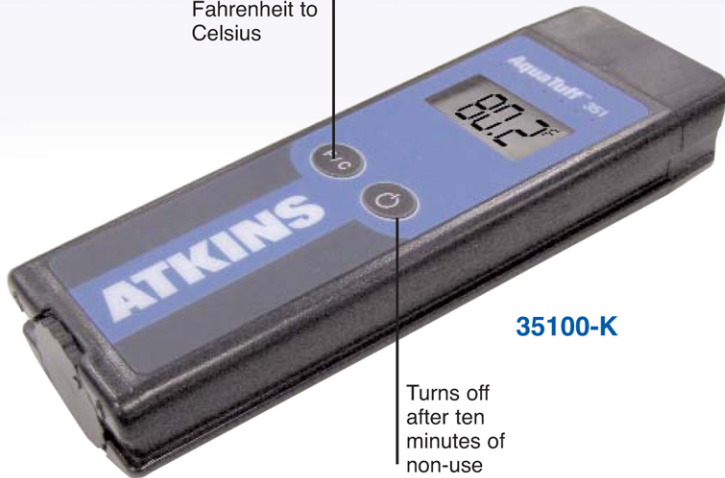

35100-K

Turns off after ten minutes of non-use

Specifications

- Temperature Range: -100 to 999°F (-73 to 537°C)
- Resolution: Tenth Degree (0.1°) 35200-K resolution 0.1° / 1° user selectable
- Rugged ABS plastic housing
- Large, easy-to-read LCD screen
- IPX7 Waterproof Rated
- Auto shut-off after 10 minutes of non-use (User selectable on 35200-K models)
- 352 Hold and backlight
- Uses any Type K probe
- Compliances: CE Marking, NSF, RoHS, WEEE
- Factory calibration constants stored in non-volatile memory
- Accuracy: With factory calibration, $\pm 0.5^\circ\text{F}$ ($\pm 0.3^\circ\text{C}$) over entire measurement range at ambient temperatures between 68 to 86°F (20 to 30°C)
- No Calibration Required: Your AquaTuff™ is factory calibrated to N.I.S.T. traceable standards. Under normal operating conditions, it will not need to be recalibrated
- Traceability: We certify that this instrument has been calibrated to temperature and / or electrical standards traceable to the U.S. Department of Commerce National Institute of Standards and Technology
- Battery Type/Life: 2 AAA Alkaline Batteries/1800 Hrs
- Battery compartment is reverse polarity protected to prevent damage to circuit board if batteries are installed improperly
- One per corrugated box with 4 color process label
- Warranty: Instrument - 5 years, Probe - 1 year



Easy twist-open battery hatch, two AAA batteries included

Units use any Type "K" Probe



One Stroke Inks
800-942-4447

www.onestrokeinks.com